

SCH is an ideal compact and robust solution for two-photon, SHG microscopy, and a variety of other non-linear processing and spectroscopy applications. A cost-effective, maintenance-free laser source with best-in-class performance.



FYLA SCH Specifications

Total Power	>250 mW
Fundamental Pulsewidth	15-1000 fs



FYLA SCH Specifications

Spectral Range	950-1150 nm
Repetition Rate	75 MHz
Full Spectrum Power Stability	<0.5% over 3 h
Output Polarization	Unpolarized
Output Fiber / Length	Fiber or with dispersion compensation module - free space
Optical Output	Collimated, single-mode across full spectrum
Beam Diameter	2.4 mm ($1/e^2$ at 1064 nm)
M2 Parameter	<1.2 Fundamental Gaussian
Cooling	Conductive
Power Requirements	220/110V 50-60 Hz
Displayed Parameters (Controlled)	N/A
Control Modes	N/A
Operating Temperatures	20 - 30 °C
Storage Temperature	0 - 60 °C


FYLA SCH Specifications

Dimensions (mm) 436x560x151 mm (WxDxH)


Dispersion Pre-Compensation -4000 fs² to +2500 fs²

Optical Peak Power > 100 kW

Specifications are subject to change without notice*

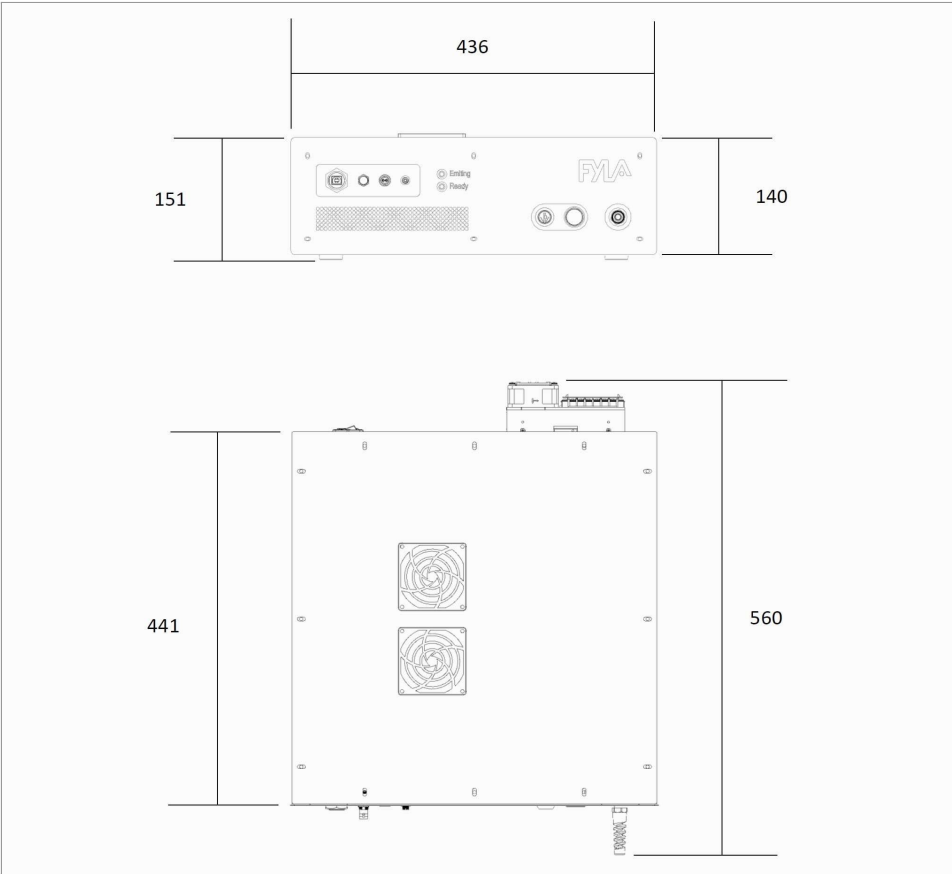

Dimensions in mm

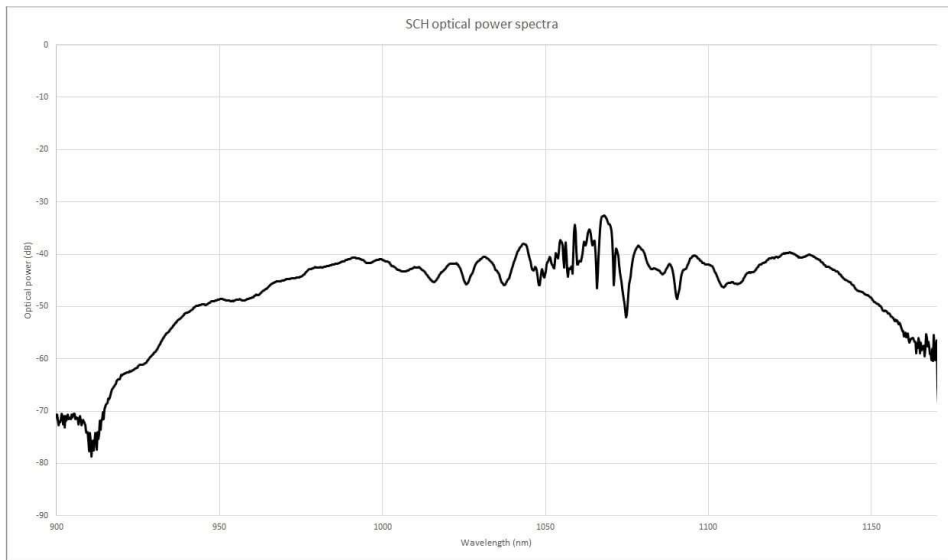

SCH optical spectrum



Ronda Guglielmo Marconi 12. Parque Tecnológico 46980 Paterna - Valencia (Spain)
Tel +34 96 389 10 92 / Fax +34 393 12 95 / fyla@fyla.com / www.fyla.com

We use (our own and third-party) cookies for personalization and advertising purposes to create profiles based on your web browsing history, for example, to show you personalized content. You can accept all cookies by clicking "Accept", or configure them in [settings](#).

Accept

Reject

Settings